


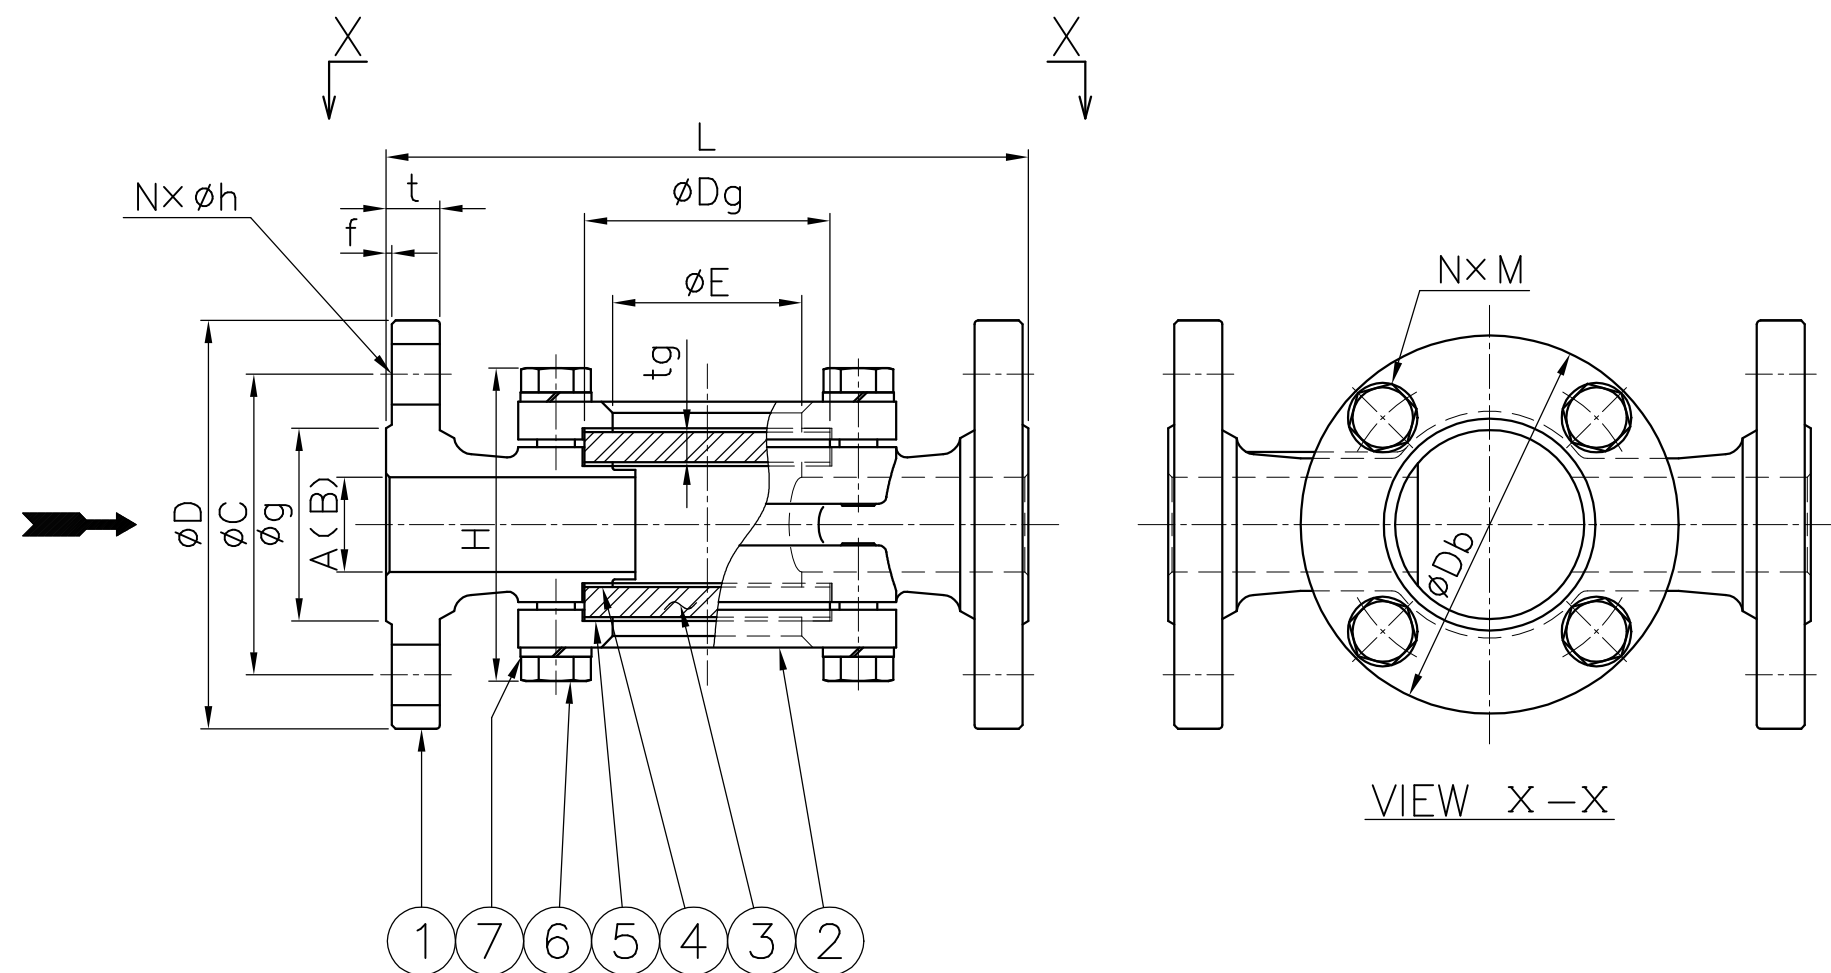

※1 INSIDE DIA. OF FLANGE (15A-φ20)
(32A-φ40)

SIZE A (B)	L	H ABOUT	E	Db	③ GLASS		FLANGE ASME 150Lb - RF						⑥ BOLT NxM	④ GASKET ⑤ CUSHION	WEIGHT (kg) ABOUT	Q'ty	REMARKS
					Dg	tg	D	t	f	g	C	Nxh					
※1 15 (1/2)	150	78	40	86	50	6	89	11.2	1.6	35.1	60.5	4x16	4xM10	φ50xφ40xt1	3		
20 (3/4)	150	78	40	86	50	6	99	12.7	1.6	42.9	69.8	4x16	4xM10	50x 40x 1	3.5		
25 (1)	170	86	50	100	65	8	108	14.3	1.6	50.8	79.2	4x16	4xM10	65x 52x 1	5		
※1 32 (1 1/4)	200	114	65	124	80	10	117	15.8	1.6	63.5	88.9	4x16	4xM12	80x 67x 1	6		
40 (1 1/2)	200	114	65	124	80	10	127	17.6	1.6	73.2	98.6	4x16	4xM12	80x 67x 1	8		
50 (2)	220	134	80	140	95	12	152	19.1	1.6	91.9	120.6	4x19	4xM12	95x 82x 1	11.5		

USER	
NAME	SIGHT GLASS
MODEL	GK20PH2F
SIZE	SEE BELOW LEFT
FLANGE RATING	ASME 150Lb-RF
MAX. PRESSURE	0.98 MPaG
MAX. TEMPERATURE	150 °C
TEST PRESSURE (WATER)	1.96 MPaG
TEST PRESSURE (AIR or N ₂)	—

7	Spring Washers	SWRH	Nx2	
6	Bolts	S45C	Nx2	
5	Cushions	PTFE	2	
4	Gaskets	PTFE	2	
3	Glass	Tempered Glass	2	
2	Covers	SS400	2	
1	Body	SCPH2	1	
PART NO.	PART NAME	MATERIAL	REQ'D NO.	REMARKS
BILL OF MATERIAL				
WASINO KIKI CO.,LTD.				
MODEL		GK20PH2F		
NAME		SIGHT GLASS		
DATE		1, Apr, 2020		SCALE
APPROVED		Y.S		NO.
CHECKED		J.M		DESCRIPTION
DESIGN		Y,H		BY
DRAWN		Y,H		DATE
DWG.NO.		GA6123-1		REV.